Installation

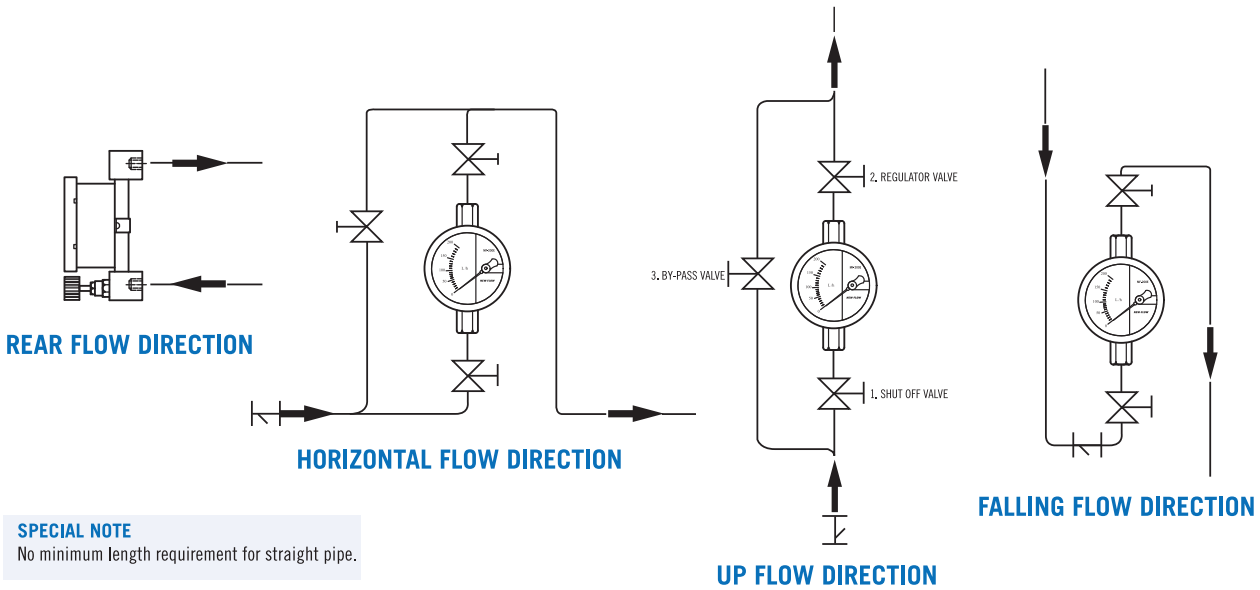

SPECIAL NOTE
No minimum length requirement for straight pipe.

Ordering Information

MF200E	Code	Connection
	S	Thread connection
	R	Connection with needle valve
	T	Flange connection
	B	Rear connection with needle valve

Code	Type
G	Indicating only

Code	Alarm
0	Without alarm switch

Code	Body material		
A	SS316	B	SS316L

Code	Float & Wetted part material		
A	SS316	B	SS316L

Code	Connection rating
0	Thread connection
5	JIS 5K
10	JIS 10K
20	JIS 20K
15	ANSI 150#
30	ANSI 300#
40	ANSI 400#
60	ANSI 600#
T	Other:_____

Code	Connection size
4B	1/4" BSP (Female)
4N	1/4" NPT (Female)
2B	1/2" BSP (Female)
2N	1/2" NPT (Female)
6B	3/4" BSP (Female)
6N	3/4" NPT (Female)
1B	1" BSP (Female)
1N	1" NPT (Female)
15B	1½" BSP (Female)
15N	1½" NPT (Female)
20B	2" BSP (Female)
20N	2" NPT (Female)
2F	½" Flange
6F	¾" Flange
10F	1" Flange
15F	1 ½" Flange

Code	Protection Class
IP	IP66 / IP68

Code	Fluid
G	Gas
O	Oil
L	Liquid
S	Steam

Code	Range
S	Standard range
	Please directly fill out the flow range in the order code.

MF200E [ ][ ][ ][ ][ ][ ][ ] + [ ][ ][ ][ ] Complete ordering code

NOTE:
1. Custom-made flow range and flange size upon request.
2. Please fill in the ordering information and service condition, and fax this sheet along with your inquiry to 886-7-8225588.

Special instruction, if any:

_____

_____

_____

Service Condition:

Fluid name: _____

Sp. Gr. (density): _____

Viscosity: _____

Press.: _____

Temp.: _____

Full scale: _____